

NYX

NYX IPD4-3312M 4MP IP Dome

Features

- 4MP (2560×1440) H.265 full real time encoding
- 3.3-12mm Motorized Auto-Focus Lens
- ICR auto switch, true day / night
- 20 ~ 30m IR night view distance
- 3D DNR, digital WDR
- ROI encoding
- Support CVBS video output and one-way audio
- Support PoE power supply
- Support smart phone, iPad, remote monitoring
- IP66 ingress protection
- Triple Stream



AUTOFOCUS



ONVIF

More
Efficient
H.265
Encoding

4MP
Network
Dome
Camera

Specifications

Image Sensor	1/3" CMOS
Resolution	4MP(2560x1440), 3MP (2304x1296), 2MP(1920x1080), 720P(1280x720), D1, CIF
Min. Illumination	0.05 lux @F1.2, AGC on; 0 lux with IR
Lens	3.3~12mm Motorized Vari-focal @F1.4, AoV 80°~38°
Day & Night	ICR Filter
Video Format	H.265 / H.264 / MJPEG
Main Stream	60Hz: 4MP / 3MP / 1080P / 720P - (1~30fps) 50Hz: 4MP / 3MP / 1080P / 720P - (1~25fps)
Wide Dynamic Image Settings	Digital WDR ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, Noise Reduction
Audio	Mic input x1, Line out x1
Video Out	CVBS
Smart Alarm	Motion Alarm, Sensor Alarm
IR Distance	20~30m
Remote	IE Browser, CMS Software up to 10 simultaneous users
Protocol	TCP/IP,UDP,DHCP,NTP,RTSP,PPPoE,DDNS,SMTP,FTP
Storage	SD card local storage (128GB), network remote storage
Housing Rating	IP66
Power Supply	DC 12V / PoE
Power Usage	<2.5W (<5W with IR on)
Operating Env.	-20°~ 50°C, 10%~90% Humidity
Dimensions	Ø 150x 114mm
Weight	1030g

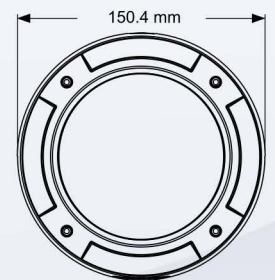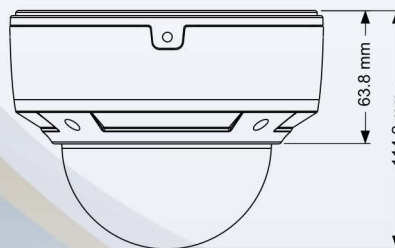

128GB
SD Card
Recording



4MP
Sensor



0 Lux min.
Illumination



Digital
WDR



Motion
Detection



True
Day/Night



AWB



Sync



AGC



PoE



IP66



www.cctvsupplies.com.au

2/175 Currumburra Road
Ashmore, Qld 4212
(07) 5527 9949